


Linear Fluorescents: General Applications

26.297.1016

G13 (Medium Bi-Pin): Push-Through Lampholders

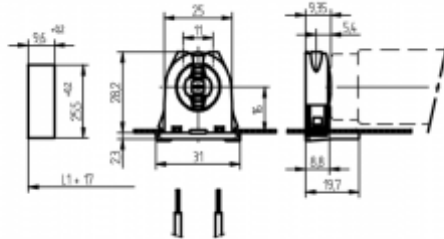

L1+17: Recommended cutout spacing . "L1" distance is determined by the length of the respective lamp.

color	pkg.	wt.	part no.
white	4000	6 g	26.297.1016.50

Approval: cULus

Lamp center: 16 mm
Push through mount

Housing: PC
Rotor: PBT

- For enclosed cut-outs
- A pair of lampholders provides a lamp length tolerance compensation of 3 mm

120°C 115°C					
			18 AWG	0.4 - 2.0	660 W 600 V