


Linear Fluorescents: General Applications

26.297.1116

G13 (Medium Bi-Pin): Push-Through Lampholders

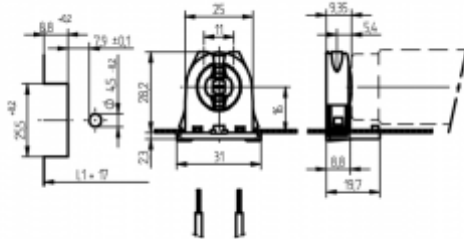

L1+17: Recommended cutout spacing . "L1" distance is determined by the length of the respective lamp.

color	pkg.	wt.	part no.
white	500	6 g	26.297.1116.50

Approval: cULus

Lamp center: 16 mm
Push through mount

Housing: PC
Rotor: PBT

- For cut-outs open at the rear or enclosed cut-outs with 4.5 mm dia. locating hole
- A pair of lampholders provides a lamp length tolerance compensation of 3 mm

120°C 115°C							660 W 600 V
					18 AWG	0.4 - 2.0	