

constant
CURRENTRIPPLE
FREE

2.2

Multipower LED drivers
Alimentatori LED multipotenza

Accessories not supplied - Accessori non a corredo		
Article - Articolo	L (length)	Code - Codice
6-pin cable for LED and AUX Cavo 6 poli per LED e AUX	50 cm / 19,68"	425720017

**Rated Voltage**
Tensione Nominale110 ÷ 127 V⁽²⁾
220 ÷ 240 V**Frequency**
Frequenza

50...60 Hz

AC Operation range
Tensione di utilizzo AC

99 ÷ 264 V

DC Operation range
Tensione di utilizzo DC

DC 176 ÷ 280 V

Power
Potenza

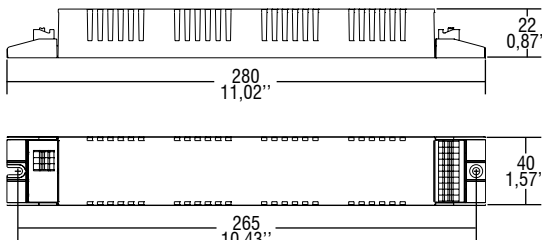
0 ÷ 60 W

Maximum current output ripple
Max. ondulazione della corrente uscita≤ 3%⁽¹⁾**Reference Norms**
Norme di riferimento:EN 50172 (VDE 0108)
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
UL 1310
UL 8750
VDE 0710-T14

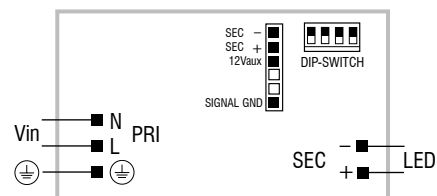
Article Articolo	Code Codice	P out W	V out DC	I out DC	n° LED max. ⁽¹⁾	V out max.	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
MP 60 SLIM	122211	25 (25 ⁽²⁾)	74 V max.	350 mA cost.	20	90	-25...+45	80 75 ⁽²⁾	0,98	> 91
		35 (35 ⁽²⁾)	72 V max.	500 mA cost.	20					
		39 (39 ⁽²⁾)	72 V max.	550 mA cost.	20					
		50 (40 ⁽²⁾)	71 V max.	700 mA cost.	18					
		60 (40 ⁽²⁾)	71 V max.	850 mA cost.	16...18					
		60 (40 ⁽²⁾)	66 V max.	900 mA cost.	16					
		60 (40 ⁽²⁾)	57 V max.	1,05 A cost.	14					
		58Vout voltage limit settable with Dip-Switch - Poutmax=60W								

⁽¹⁾ Referred to V_{in} = 230 V, 100% load - Riferito a V_{in} = 230 V, carico 100%Weight - Peso gr. 150 / 5,3 oz.
Pcs - Pezzi 30

Compatible with ZHAGA (BL2/ZS5 H5D/ ZS5 H7D)

**Wiring diagram - Schema di collegamento**

(Max. LED distance on page info8 - Massima distanza LED a pagina info8)

**Features**

- Multipower driver supplied with dip-switch for the selection of the output current.
- Driver for built-in use.
- Active Power Factor Corrector.
- Auxiliary output 12 V max. 100 mA.
- It can be used for lighting equipment in protection class I.
- Current regulation ±5 % including temperature variations.
- Input and output terminal blocks on the opposite sides (wire cross-section up to 1,5 - 2,5 mm² / AWG15 - AWG13).
- Driver can be secured with slot for screws.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.a.

Caratteristiche

- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- Alimentatore da incorporare.
- PFC attivo.
- Uscita ausiliare 12 V max. 100 mA.
- Utilizzabile per apparecchi di illuminazione in classe di protezione I.
- Corrente regolata ±5 % incluse variazioni di temperatura.
- Morsetti di entrata e uscita contrapposti (sezione cavo fino a 1,5 - 2,5 mm² / AWG15 - AWG13).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Protezione termica = C.5.a.

