

MW 70 LED NOT DIMMABLE



12 V electronic transformer for LED bulbs and halogen lamps
Trasformatore elettronico 12 V per lampade LED e alogene

Made in Europe



SELV



Voltage
Tensione
 230 ÷ 240 V

Frequency
Frequenza
 50...60 Hz

Power
Potenza
 2,5 ÷ 70 W


Reference Norms
Norme di riferimento:
 EN 55015
 EN 60598-1
 EN 61000-3-2
 EN 61347-1
 EN 61347-2-2
 EN 61547
 VDE 0710-T14

Lamps
Lampade:
 Halogen lamps
 LED bulbs

Article Articolo	Code Codice	Power out W	V in Vac	V out Vac 50 kHz	ta °C	tc °C	λ max. Power Factor	Colours Colori
MW 70 LED	119773	2,5 ÷ 70	230 ÷ 240	12 Vac	40	90	0,97	Bianco - White





IP 20




Weight - Peso:
 gr. 60 / 2,10 oz.
 Pcs - Pezzi 30

Compatible with ZHAGA (AM6)

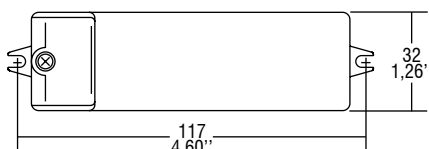

Wiring diagrams - Schemi di collegamento

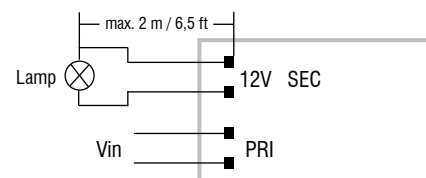

Features

- IP20 independent transformer for lamps 12 Vac:
 2,5 ÷ 70 halogen lamps;
2,5 ÷ 50 LED lamps (max. 4/5 lamps).
- Class II protection against electric shock for direct or indirect contact.
- Complete with terminal cover and cable retainer.
- Input and output terminal blocks on the same side (wire cross-section up to 0,5 - 2,5 mm² / AWG20 - AWG13).
- Clamping screws on primary and secondary circuits for cables with diameter: min. 3 mm - max. 6 mm.
- Max 18 mm cable peel-off.
- The transformer can be secured with slot for screws.
- Ultra compact size.
- Protections:
 - against overheating and short circuits.
 - against mains voltage spikes.
 - against overloads.

Before use always check the compatibility with the LED lamps of the application.

Caratteristiche

- Trasformatore indipendente IP20 per lampade 12 Vac:
 2,5 ÷ 70 lampade alogene;
2,5 ÷ 50 lampade LED (max. 4/5 lampade).
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fornito di coprimorsetto e fissacavo.
- Morsetti di entrata e uscita sullo stesso lato (sezione cavo fino a 0,5 - 2,5 mm² / AWG20 - AWG13).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 6 mm.
- Sguainatura dei cavi max. 18 mm.
- Fissaggio del trasformatore tramite asole per viti.
- Dimensioni ultra compatte.
- Protezioni:
 - termica e corto circuito.
 - contro le extra tensioni di rete.
 - contro i sovraccarichi.

Prima dell'uso verificare la compatibilità con le lampade LED dell'applicazione.



Electronic transformers for retrofit LED lamps
 Trasformatori elettronici per lampade LED e alogene

9.