

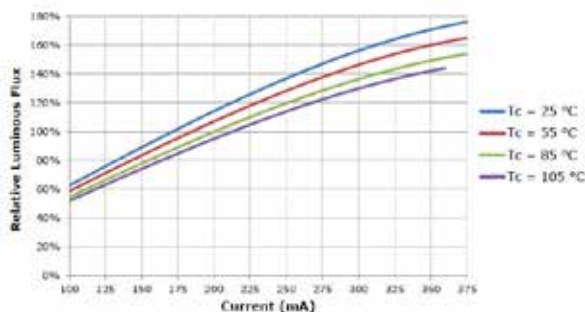


ANSI white bins plotted on the 1931 CIE Color Space ( $T_j = 85^\circ\text{C}$ )

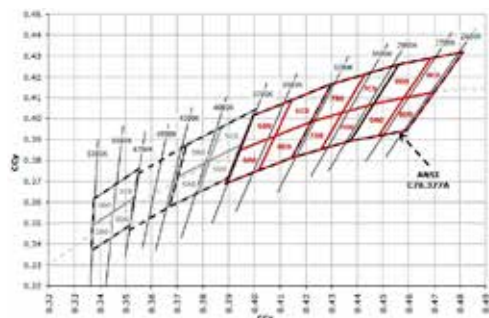

**Dimensions/Dimensioni - Weight/Peso - Pcs/Pezzi**

**SPOT LED 600** (Weight/Peso 3,17 oz. / gr. 90 - Pcs/Pezzi 1)

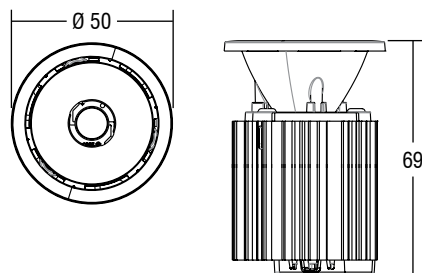


6.

Spot LED for shop lighting  
Spot LED per illuminazione commerciale

**LED driver choice table - Tabella di scelta driver**

			Standard Driver		Standard Driver PFC>0,9		Dimmable 1-10V & PUSH		Dimmable DALI	
Article	Current	Power	Article	Code	Article	Code	Article	Code	Article	Code
LED SPOT 600	150	5	MP 15	122360	UNIVERSALE LC	122203	MINI JOLLY LC	122401	-	-
	200	7	MP 15	122360	UNIVERSALE LC	122203	MINI JOLLY LC	122401	-	-
	250	8,7	MP 15	122360	UNIVERSALE 20	122201	MINI JOLLY LC	122401	MINI JOLLY DALI	122403
			DCC 10W 250mA US	122358	UNIVERSALE LC	122203				

Article	Code	Rated Voltage	P out W <sup>(1)</sup>	V out	dimension (mm)	Ø mm 	Efficiency $\eta$ (100 %) <sup>(1)</sup>	ta °C	tc °C	Power Factor $\lambda$	Dimmable
DCC 10W 250mA	122358	110-240	10	43	115x34x19	40	73	-25+50	75	0,6 C	NO
DCC 15W 350mA	122350	110-240	15 (10)	43	115x34x19	40	77	-25+45	75	0,6 C	NO
MP 15	122360	100-240	15 (10)	41,5	115x34x19	40	82	-25+50	75	0,6 C	NO
UNIVERSALE 20	122201	220-240	20	57	110x52x22	55	>88	-25+50	80	0,95	NO
UNIVERSALE 20 LC	122203	220-240	20	55	110x52x22	55	>87	-25+50	75	0,95	NO
MINI JOLLY	122400	110-240	20	43	110x52x22	55	>87	-25+50	80	0,95	1...10V - PUSH
MINI JOLLY LC	122401	110-240	20	43	110x52x22	55	>87	-25+45	75	0,95	1...10V - PUSH
MINI JOLLY DALI	122403	110-240	20	43	110x52x22	55	>87	-25+45	75	0,95	DALI

<sup>(1)</sup> Referred to  $V_{in} = 230\text{ V}$ , 100% load - Riferito a  $V_{in} = 230\text{ V}$ , carico 100%